



Mono X™ NeON

LG300N1C-B3



Clean power from the Australian sun with LG's Mono X™ modules.

The Mono X™ NeON benefits from LG's years of research and development and our commitment to long lasting products of high quality. The high efficiency Mono X™ NeON is loaded with features for easy installation. Our high quality module will provide decades of clean, reliable energy.

Choosing LG's state-of-the-art Mono X™ is an investment in superior standards of design, manufacture, back up support and warranties.



Long Lasting Warranties

The Mono X™ NeON support warranties include a 10 year product warranty and a linear 25 year output warranty. The linear output warranty guarantees a minimum power output of 80.2% after 25 years. Because it's LG – these top class warranties give you peace of mind.



Designed for Durability

LG solar modules are designed with durable glass to be light in weight (17.3 kg) while also being able to withstand heavy loads and external pressure up to 5400 Pa.



Positive Power Tolerance

LG provides rigorous quality testing to all solar modules to ensure the rated power output. Our Mono X™ NeON modules have a positive nominal tolerance starting at 0% and going as high as +3%.



Highest Testing Standards

After a rigorous process, LG's product durability testing laboratory has earned certification from both TÜV Rheinland and UL (Underwriters Laboratories), a first in the solar industry.



LG Sign-Off on Every Cell

Driven by LG's own N-type cell technology, the Mono X™ NeON offers high efficiency to create solar systems with higher electricity generation than standard systems. LG is proud to sign-off on every single manufactured solar cell with our LG brand. The LG logo reflects cutting edge technology and durability.



Reliable for the future

LG's world-class integrated production processes and quality controls create a solar product that is reliable and long lasting. For example every single LG module is tested via an Electroluminescence inspection. The EL inspection detects any micro cracks unseen by the naked eye.

Mechanical Properties


| | |
|------------------------|--|
| Cells | 6 x 10 |
| Cell vendor | LG |
| Cell type | Monocrystalline |
| Cell dimensions | 156.5 x 156.5mm |
| # of busbar | 3 |
| Dimensions (L x W x H) | 1640 x 1000 x 35 mm |
| Maximum load (Pa) | 5400 |
| Weight | 17.3 kg |
| Connector type | MC4 connector IP67 |
| Junction box | IP 67 with 3 bypass diodes |
| Length of cables | 2 x 1000 mm |
| Frame | Anodized Aluminum with protective black coating |
| Glass | High transmission tempered glass |

Certifications and Warranty


| | |
|---|---|
| Certifications | IEC 61215, IEC 61730-1/-2, IEC 62716 Salt Mist Corrosion Test (IEC 61701) UL 1703, ISO 9001 |
| Product warranty | 10 years |
| Output warranty of Pmax (measurement tolerance $\pm 3\%$) | Linear Warranty* |

* 1) 1st year: 98% 2) After 2nd year: 0.7% p annual degradation 3) 81.2% after 25 years.

Current - Voltage characteristics at various irradiance levels

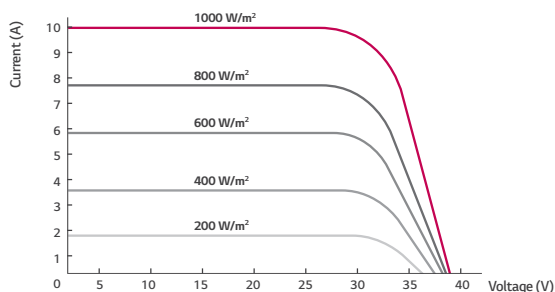

Current - Voltage characteristics at various cell temperatures

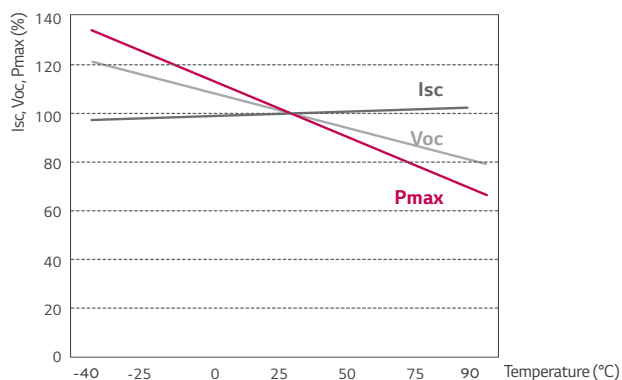

Electrical Properties (STC*)

| LG300N1C-B3 | |
|--------------------------------|------------|
| Maximum power at STC (Pmax) | 300 |
| MPP voltage (Vmpp) | 32.0 |
| MPP current (Impp) | 9.40 |
| Open circuit voltage (Voc) | 39.8 |
| Short circuit current (Isc) | 9.98 |
| Module efficiency (%) | 18.3 |
| Operating temperature (°C) | -40 ~ +90 |
| Maximum system voltage (V) | 1000 (IEC) |
| Maximum series fuse rating (A) | 20 |
| Power tolerance (%) | 0 ~ +3 |


* STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5

* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Temperature Coefficients

| | |
|------|-----------------|
| NOCT | 45.0 \pm 2 °C |
| Pmpp | -0.41 % / °C |
| Voc | -0.29% / °C |
| Isc | 0.04 % / °C |

Dimensions (mm)

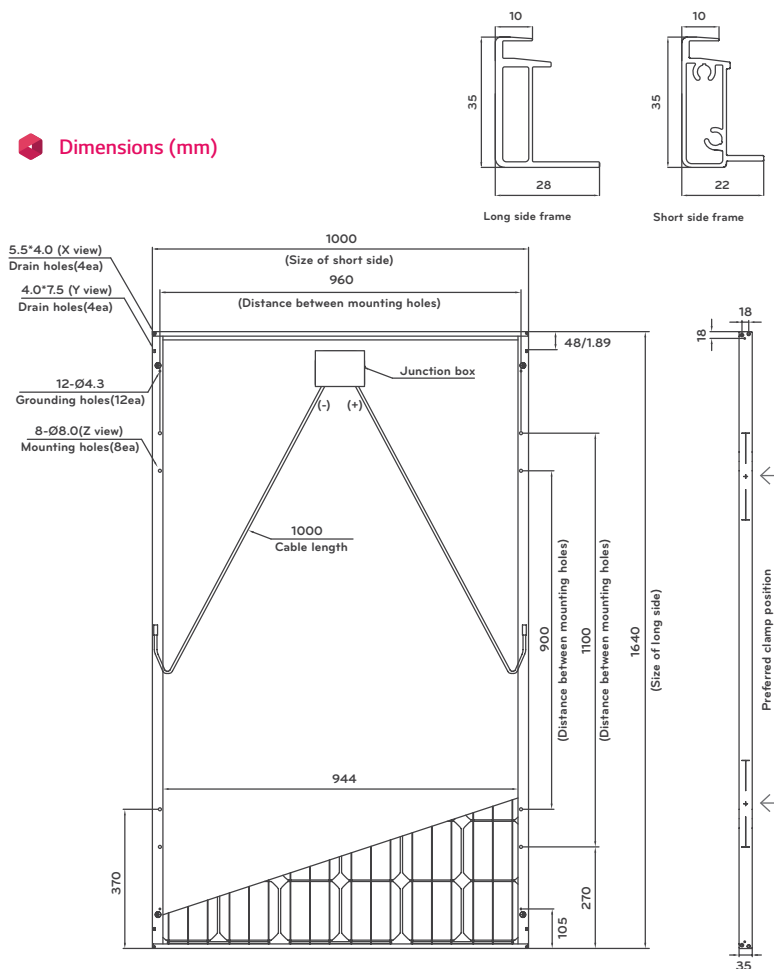

* The distance between the center of the mounting/grounding holes