



# MONO



## PowerGuard Insurance Global Coverage

The power output shall not be less than 96.5% of the minimum power output stated in the product data sheet in the first year of the product's life cycle. The loss of power output shall not exceed 0.68% per year thereafter, ending with 80.18% in the 25th year.

■ CSUN    ■ Standard Warranty

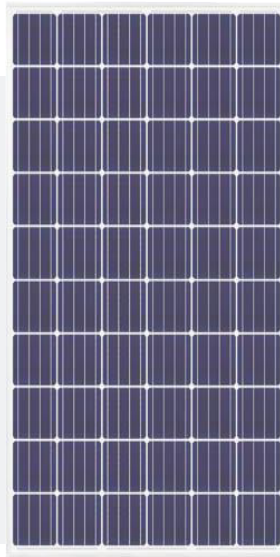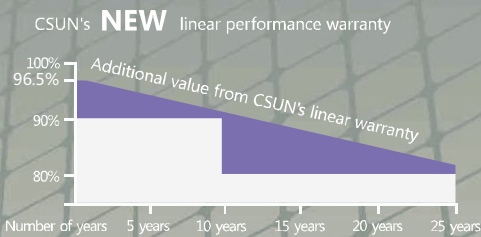

## CSUN310-60M

The Large Scale Project Solution

CSUN310-60M    CSUN305-60M    CSUN300-60M  
CSUN295-60M    CSUN290-60M

### 19.09%

Module efficiency



World class mono efficiency

### 310W

Highest power output



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation

### 10years

Material & Workmanship warranty



Positive tolerance offer

### 25years

Linear power output warranty



Good temperature coefficient enables higher output in high temperature regions



Excellent performance under low light conditions



Load certificates: wind to 2400Pa and snow to 5400Pa

- China Sunergy Co., Ltd. designs, manufactures and delivers high efficient solar cells and modules to the world from its production centers based in China, Turkey, South Korea and Vietnam.
- Founded in 2004, China Sunergy is well known for its advanced solar cell technology reliable product quality and excellent customer service.
- As one of leading PV enterprises, China Sunergy has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

- Note:  
All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

All information and data are subject to change without notice.

Right 2017



## Electrical characteristics at Standard Test Conditions(STC)

Module Type	CSUN310-60M	CSUN305-60M	CSUN300-60M	CSUN295-60M	CSUN290-60M
Maximum Power - Pmax (W)	310	305	300	295	290
Open Circuit Voltage - Voc (V)	40.0	39.9	39.8	39.6	39.5
Short Circuit Current - Isc (A)	9.81	9.72	9.6	9.54	9.47
Maximum Power Voltage - Vmpp (V)	32.6	32.4	32.2	32	31.9
Maximum Power Current - Imp (A)	9.52	9.42	9.31	9.22	9.1
Module Efficiency	19.09	18.78%	18.48%	18.17%	17.86%

Standard Test Conditions (STC): irradiance 1,000 W/m<sup>2</sup>; AM 1.5; module temperature 25°C. Tolerance of P<sub>mp</sub>: 0~+3%.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

## Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	CSUN310-60M	CSUN305-60M	CSUN300-60M	CSUN295-60M	CSUN290-60M
Maximum Power - Pmax (W)	233	229	225	220	216
Open Circuit Voltage - Voc (V)	37.5	37.4	37.3	37	36.9
Short Circuit Current - Isc (A)	7.95	7.84	7.74	7.69	7.64
Maximum Power Voltage - Vmpp (V)	31.3	31.1	30.9	30.6	30.3
Maximum Power Current - Imp (A)	7.47	7.38	7.28	7.22	7.14

Normal Operating Cell Temperature( NOCT) : irradiance 800W/m<sup>2</sup>; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

## Temperature Characteristics

NOTC	45°C ( ±2°C )	Maximum System Voltage [V]	1000
Voltage Temperature Coefficient	-0.29%/K	Series Fuse Rating [A]	15
Current Temperature Coefficient	+0.05%/K		
Power Temperature Coefficient	-0.39%/K		

## Maximum Ratings

## Material Characteristics


Dimensions	1640×990×35mm (L×W×H)
Weight	18.3kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×10 pieces monocrystalline solar cells series strings (156mm×156mm)
Junction Box	Rated current≥13A, IP≥67, TUV&UL
Cable&Connector	Length 900 mm, 1×4 mm <sup>2</sup> , Model Number: PV-ZH202B

## Packaging

Dimensions(L×W×H)	1690×1120×112mm	Temperature Range	-40 °C to + 85 °C
Container20'	360	Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m·s <sup>-1</sup>
Container40'	840	Maximum Surface Load	5,400 Pa
Container40'HC	910	Application class	class A
		Safety class	class II

## System Design

## Dimensions

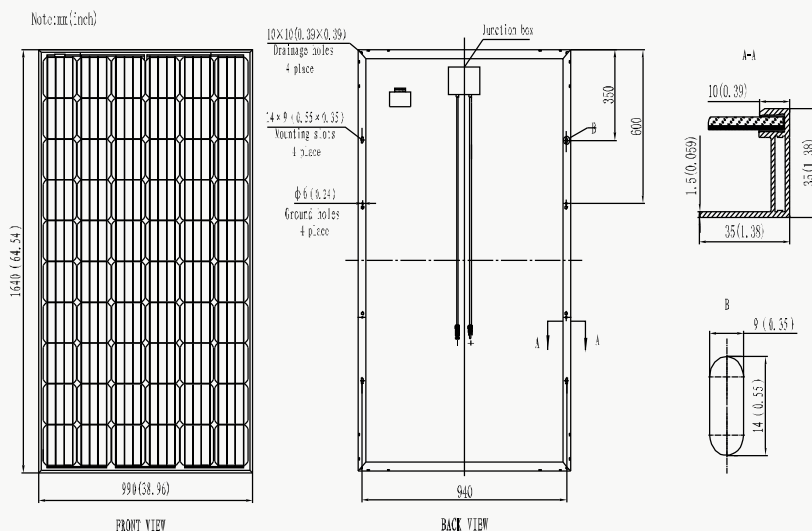

## IV-Curves

