

powered by

**Q.ANTUM**

# Q.PLUS BFR-G4.1 275-285

## POLYCRYSTALLINE SOLAR MODULE

The new high-performance module **Q.PLUS BFR-G4.1** is the ideal solution for all applications thanks to its innovative cell technology **Q.ANTUM**. The world-record cell design was developed to achieve the best performance under real conditions – even with low radiation intensity and on clear, hot summer days.



### LOW ELECTRICITY GENERATION COSTS

Higher yield per surface area and lower BOS costs thanks to higher power classes and an efficiency rate of up to 17.4%.



### INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior.



### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti-PID Technology<sup>1</sup>, Hot-Spot-Protect and Traceable Quality Tra.Q™.



### LIGHT-WEIGHT QUALITY FRAME

High-tech aluminum alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa) regarding IEC.



### MAXIMUM COST REDUCTIONS

Up to 10% lower logistics costs due to higher module capacity per box.



### A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance guarantee<sup>2</sup>.



### THE IDEAL SOLUTION FOR:



Rooftop arrays on residential buildings



Rooftop arrays on commercial/industrial buildings

Engineered in **Germany**


**Q CELLS**

<sup>1</sup> APT test conditions: Cells at -1500V against grounded, with conductive metal foil covered module surface, 25°C, 168h

<sup>2</sup> See data sheet on rear for further information.

## MECHANICAL SPECIFICATION

<b>Format</b>	1670 mm × 1000 mm × 32 mm (including frame)
<b>Weight</b>	18.8 kg
<b>Front Cover</b>	3.2 mm thermally pre-stressed glass with anti-reflection technology
<b>Back Cover</b>	Composite film
<b>Frame</b>	Black anodised aluminium
<b>Cell</b>	6 × 10 Q.ANTUM solar cells
<b>Junction Box</b>	77 mm × 90 mm × 15.8 mm Protection class IP67, with bypass diodes
<b>Cable</b>	4 mm <sup>2</sup> Solar cable; (+) ≥ 1000 mm, (-) ≥ 1000 mm
<b>Connector</b>	Genuine Multi-Contact MC4, IP68

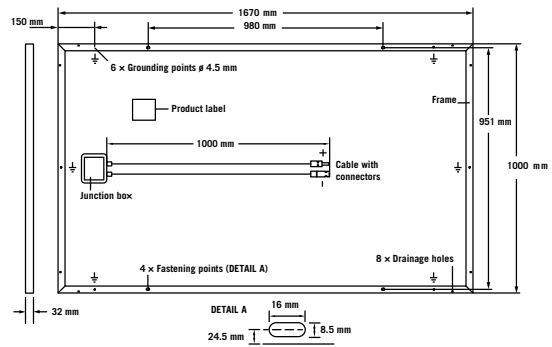


## ELECTRICAL CHARACTERISTICS

POWER CLASS			275	280	285
<b>MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC<sup>1</sup> (POWER TOLERANCE +5 W /-0 W)</b>					
Minimum	Power at MPP <sup>2</sup>	$P_{MPP}$ [W]	275	280	285
	Short Circuit Current*	$I_{SC}$ [A]	9.35	9.41	9.46
	Open Circuit Voltage*	$V_{OC}$ [V]	38.72	38.97	39.22
	Current at MPP*	$I_{MPP}$ [A]	8.77	8.84	8.91
	Voltage at MPP*	$V_{MPP}$ [V]	31.36	31.67	31.99
	Efficiency <sup>2</sup>	$\eta$ [%]	≥ 16.5	≥ 16.8	≥ 17.1
<b>MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOC<sup>3</sup></b>					
Minimum	Power at MPP <sup>2</sup>	$P_{MPP}$ [W]	203.3	207.0	210.7
	Short Circuit Current*	$I_{SC}$ [A]	7.54	7.58	7.63
	Open Circuit Voltage*	$V_{OC}$ [V]	36.13	36.37	36.61
	Current at MPP*	$I_{MPP}$ [A]	6.87	6.93	6.99
	Voltage at MPP*	$V_{MPP}$ [V]	29.59	29.87	30.15

<sup>1</sup>1000 W/m<sup>2</sup>, 25 °C, spectrum AM 1.5 G    <sup>2</sup>Measurement tolerances STC ± 3%; NOC ± 5%    <sup>3</sup>800 W/m<sup>2</sup>, NOCT, spectrum AM 1.5 G    \* typical values, actual values may differ


## Q CELLS PERFORMANCE WARRANTY

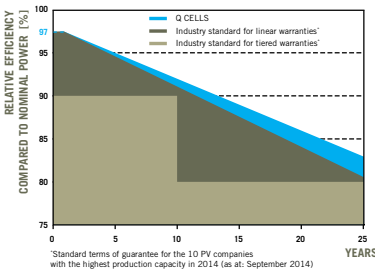

At least 97% of nominal power during first year. Thereafter max. 0.6% degradation per year.  
At least 92% of nominal power after 10 years.  
At least 83% of nominal power after 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

## PERFORMANCE AT LOW IRRADIANCE

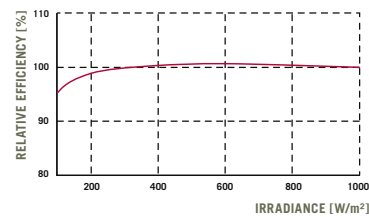

The typical change in module efficiency at an irradiance of 200 W/m<sup>2</sup> in relation to 1000 W/m<sup>2</sup> (both at 25 °C and AM 1.5 G spectrum) is -2.5% (relative).

## TEMPERATURE COEFFICIENTS

<b>Temperature Coefficient of <math>I_{SC}</math></b>	$\alpha$ [%/K]	+0.04	<b>Temperature Coefficient of <math>V_{OC}</math></b>	$\beta$ [%/K]	-0.29
<b>Temperature Coefficient of <math>P_{MPP}</math></b>	$\gamma$ [%/K]	-0.40	<b>Normal Operating Cell Temperature</b>	<b>NOCT</b> [°C]	45

## PROPERTIES FOR SYSTEM DESIGN

<b>Maximum System Voltage</b>	$V_{SYS}$ [V]	1000	<b>Safety Class</b>	II
<b>Maximum Reverse Current</b>	$I_r$ [A]	20	<b>Fire Rating</b>	C
<b>Wind/Snow Load (in accordance with IEC 61215)</b>	[Pa]	4000/5400	<b>Permitted Module Temperature On Continuous Duty</b>	-40 °C up to +85 °C

## QUALIFICATIONS AND CERTIFICATES

UL 1703; VDE Quality Tested; CE-compliant;  
IEC 61215 (Ed.2); IEC 61730 (Ed.1) application class A



## PARTNER

**NOTE:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS Australia Pty Ltd  
1402, 20 Berry St., North Sydney NSW 2060, Australia | TEL +61 (0) 29016 3033 | FAX +61 (0) 29016 3032 | EMAIL q-cells-australia@q-cells.com | WEB www.q-cells.com.au

Engineered in Germany

