









Sable 425-440W

High efficiency bifacial modules



TOPCon 182mm

• **TOPCon MODULE ADVANTAGE**

-  Multi-Busbar technology
-  Superior load capacity
-  High module efficiency
-  Excellent low-light performance
-  Lower annual attenuation
Longer warranty
-  Low BOS and LCOE
-  Reduce hot spot effect
-  Higher bifaciality


• **QUALITY SYSTEM**
ISO9001 / ISO14001 / ISO45001

• **PRODUCT CERTIFICATION**



• **INSURANCE**
PICC

• **WARRANTY**

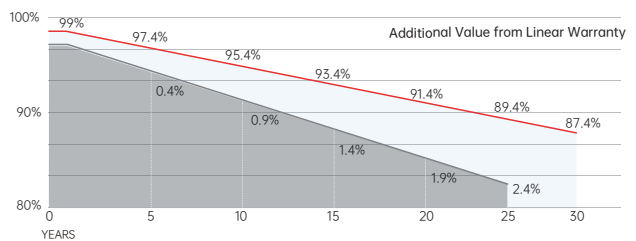

15 YEARS Guarantee on product material and workmanship

30 YEARS Linear power output warranty



Jiangsu Seraphim Solar System Co., Ltd.

Add: NO.10 TongShun road, Henglin Town, Wujin District, Changzhou, Jiangsu Province, China.
Tel: +86-564-7736177 Email: info@seraphim-energy.com


Mechanical Specifications

External Dimension	1722 x 1134 x 30 mm	
Weight	24.0 kg	
Solar Cells	TOPCon 182 x 91mm (108pcs)	
Front / Back Glass	2.0mm AR coating semi-tempered glass, low iron	
Frame	Anodized aluminium alloy	
Junction Box	IP68, 3 diodes	
Output Cables	4.0mm ² , 250mm(+)/350mm(-) or Customized Length	
Connector	Genuine MC4 EVO2/Zerun Z4S-abcde/QC Solar QC4.10-cds	
Fire Safety Class	Class A	

Packing Configuration

Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	6	26
Pieces per Container	216	936

Technical drawing

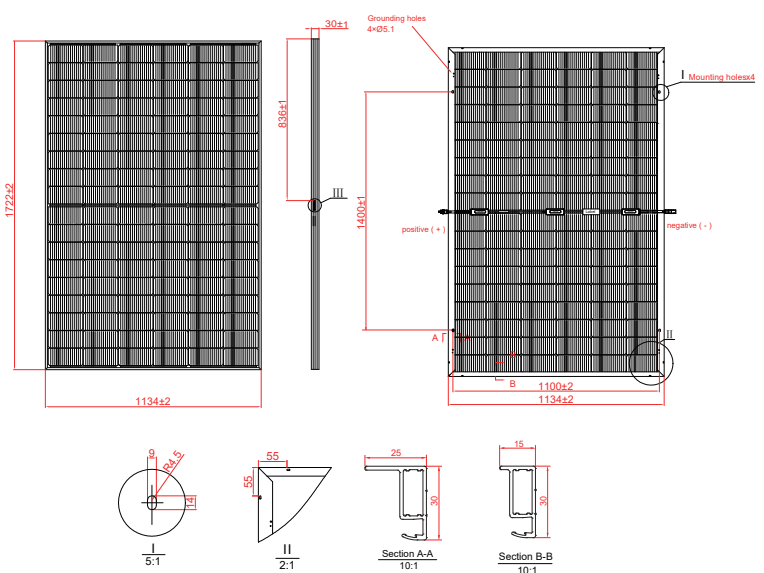

Electrical Characteristics


Module Type	SRP-425-BTD-BG			SRP-430-BTD-BG			SRP-435-BTD-BG			SRP-440-BTD-BG		
	Front STC	Front BNPI	Back STC	Front STC	Front BNPI	Back STC	Front STC	Front BNPI	Back STC	Front STC	Front BNPI	Back STC
Maximum Power -P _{mp} (W)	425	466	340	430	471	344	435	477	348	440	482	352
Open Circuit Voltage -V _{oc} (V)	38.70	38.78	38.68	38.90	38.98	38.88	39.10	39.18	39.08	39.30	39.38	39.28
Short Circuit Current -I _{sc} (A)	13.91	15.25	11.13	13.99	15.33	11.19	14.07	15.42	11.26	14.15	15.51	11.32
Maximum Power Voltage -V _{mp} (V)	32.10	32.18	32.08	32.30	32.38	32.28	32.50	32.58	32.48	32.70	32.78	32.68
Maximum Power Current -I _{mp} (A)	13.24	14.47	10.60	13.32	14.55	10.66	13.39	14.63	10.72	13.47	14.71	10.78
Module Efficiency STC-η _m (%)	21.76			22.02			22.28			22.53		
Power Measurement Tolerance							± 3%					
Power Sorting Tolerance (W)							-5W~+5W					
Pmax Temperature Coefficient							-0.29 %/°C					
Voc Temperature Coefficient							-0.25 %/°C					
Isc Temperature Coefficient							+0.046 %/°C					

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5 Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-3%; Current measurement tolerance: +/-4%
 BNPI: front 1000 W/m² rear 135 W/m² Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-3%; Current measurement tolerance: +/-4%

Rear Side Power Gain (SRP-440-BTD-BG)


Power Gain	10%	15%	20%	25%	30%
Maximum Power -P _{mp} (W)	484	506	528	550	572
Open Circuit Voltage -V _{oc} (V)	39.30	39.30	39.30	39.30	39.30
Short Circuit Current -I _{sc} (A)	15.57	16.27	16.98	17.69	18.40
Maximum Power Voltage -V _{mp} (V)	32.70	32.70	32.70	32.70	32.70
Maximum Power Current -I _{mp} (A)	14.82	15.49	16.16	16.84	17.51

I-V Curve

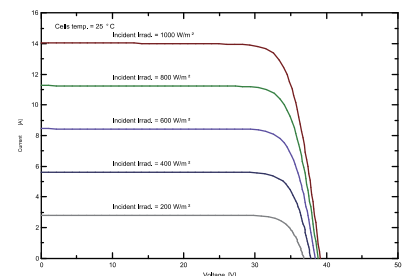

Application Conditions

Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25 A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Bifaciality	80%±5%
Mechanical Load	Front side 5400 Pa / Back side 2400 Pa

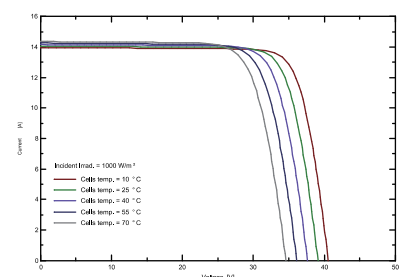

Specifications are subject to change without further notification SRP-DS-EN-2024T0830© Copyright 2024 Seraphim



Jiangsu Seraphim Solar System Co., Ltd.

Add: No.10 TongShun road, Henglin Town, Wujin District, Changzhou, Jiangsu Province, China.
 Tel: +86-564-7736177 Email: info@seraphim-energy.com